




MACSONS JOB PROFILE

Contact: Andrew Dunnum ■ Mb: (757) 310-1407 / Ph: (757) 624-1733 / Fx: (757) 624-5356 ■ adunnum@macsons.com

Heavy Demolition and Abatement of P513 “A” School Barracks



Two buildings demolished, crushing 19,000 tons of concrete; over 95% recycled.

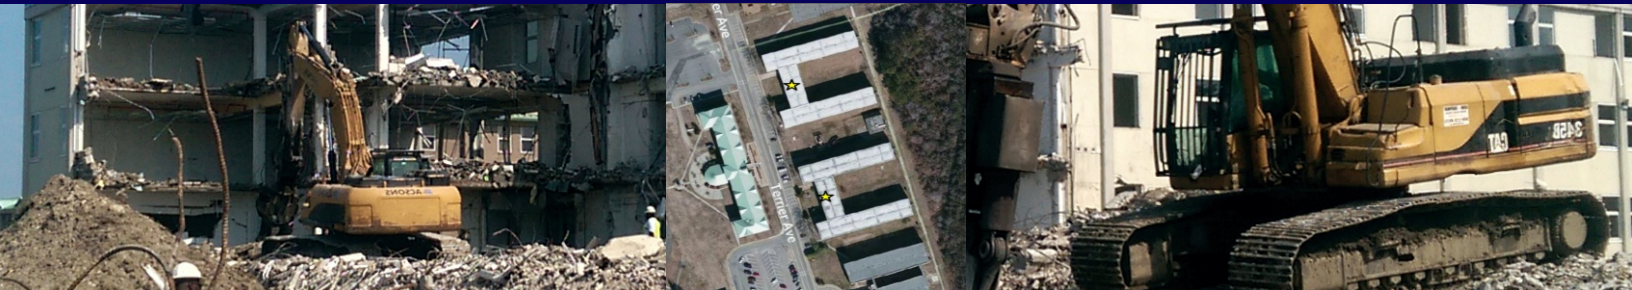

AERIAL VIEW OF SITE

Heavy Demolition

Details:

- Owner: Department of the Navy
- General Contractor: NA
- Project Name: P-513 Replace “A” School Barracks
- Location: Dam Neck Annex, NAS Oceana

Description:

Demolition of Buildings 532, 533 and site. Interior building required hazmat demolition, remediation, and disposal of asbestos, lead, PCB's and mercury. This included removal of asbestos contaminated soil from crawlspace areas. Slabs, foundations, and pile caps were demolished. Site demolition saw-cut and removed asphalt, concrete, curbs and timber piles. Concrete rubble was crushed to 21B. Areas affected by demolition were rough graded for drainage through completion. Over 19,000 tons of concrete was crushed retrieving over 95% of the building for recycling.



DEMOLITION & ENVIRONMENTAL SERVICES

Corporate Offices, Norfolk VA ■ Recycling Yard, Chesapeake VA